




## 50 pound class (22 kgs)



- » Features    » Drawing    » Specification Table    » Installation Instructions

## ■ Profile




- Clear Zinc
- Black Zinc
- Black E. Coating
- White E Coating
- Stainless Steel
- Galvanized Steel


- Production / 48 pls per box separately LH and RH packed

\*Box QTY might vary with different length,  
the info provided here is based on 18"  
(450 mm)

## Drawing

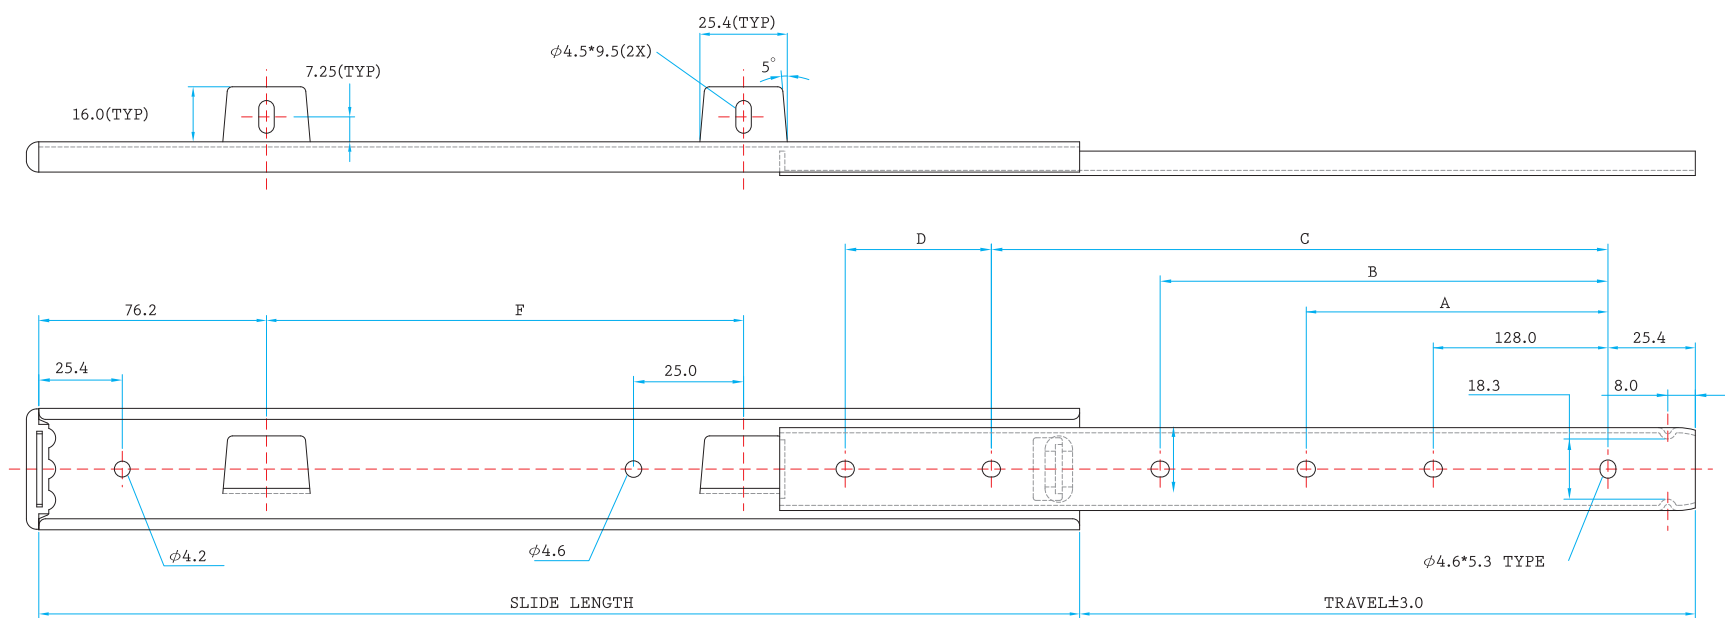

## ■ Profile

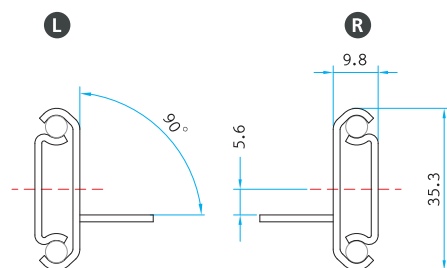

## Specification Table

SIZE	SL	TL	A	B	C	D	F
12" (300mm)	302.05	201.0			212.3	36.6	107.9
14" (350mm)	352.85	239.0			263.1	36.6	158.7
15" (375mm)	378.25	264.0			288.5	36.6	184.1
16" (400mm)	403.65	277.0			313.9	36.6	184.1
18" (450mm)	454.45	315.0	256.0		344.2	57.1	209.5
20" (500mm)	505.25	353.0	256.0		394.57	57.1	260.3
22" (550mm)	556.05	391.0	256.0		419.8	83.1	311.1
24" (600mm)	606.85	424.0	256.0	352.0	445.2	108.5	361.9


## Installation Instructions

## QUICK INSTALLATION GUIDE OF NJ-26003


Loading, Single Extension Slides, 50 pound (22 kgs) loading




A. Recommended screws for fixing - flat head 6 mm euro system screw or #8 pan head screws. Each side of slide requires at least 4 screws.

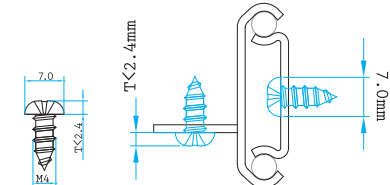


### ***Technical Specifications for drawer or pull-out shelf***

- ① Drawer or pulling-out shelf must be at least 9.8 mm narrower than cabinet opening on each side. (DIM A)
- 
- DIM A
- ② Bottom of drawer or pulling-out shelf bottom shall have 13 mm or more clearance from the bottom of cabinet. ( DIM B )
- ③ Mark a center line from the bottom of cabinet with the proper height (\*H) . ( DIM C )




\*H must be greater than 18 mm.

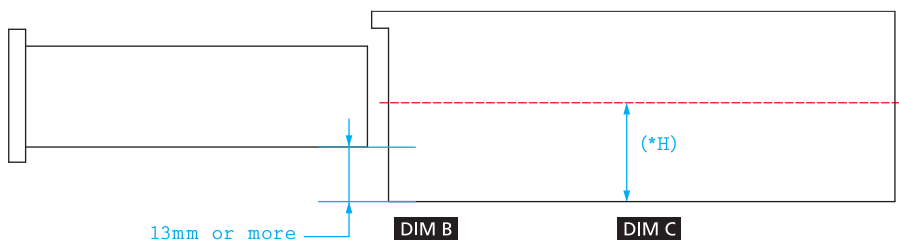


**Step 1** > Install cabinet member to cabinet

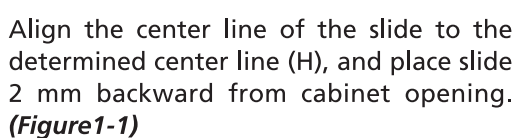


Align top of cabinet member to (H) line

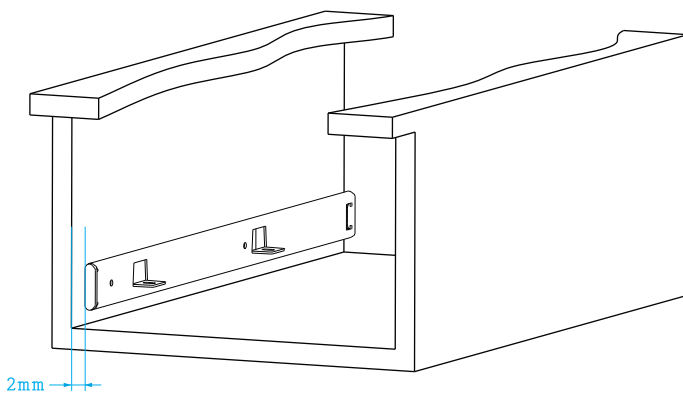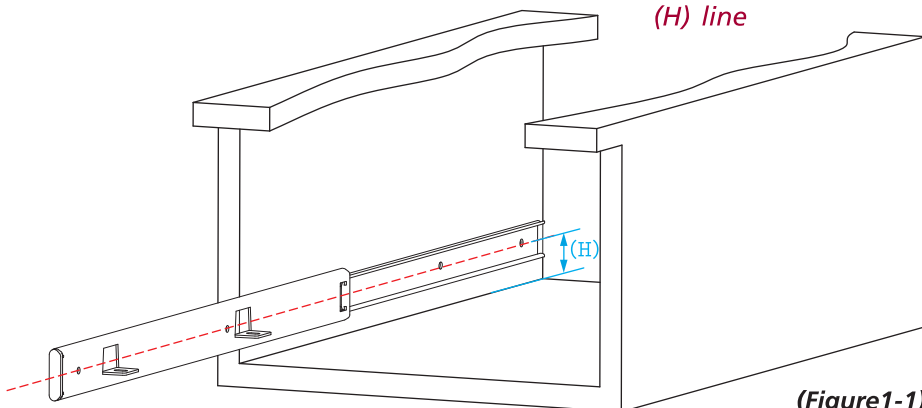

## Step 2 > Install drawer member to drawer

-  Pull slides out, and place drawer on the shelf tab. Set the outer member 2 mm backward from the drawer front or the pulling-out shelf edge. Shall the silencing cushion is used, place drawer member 5.2 mm backward. **(Figure2-1)**

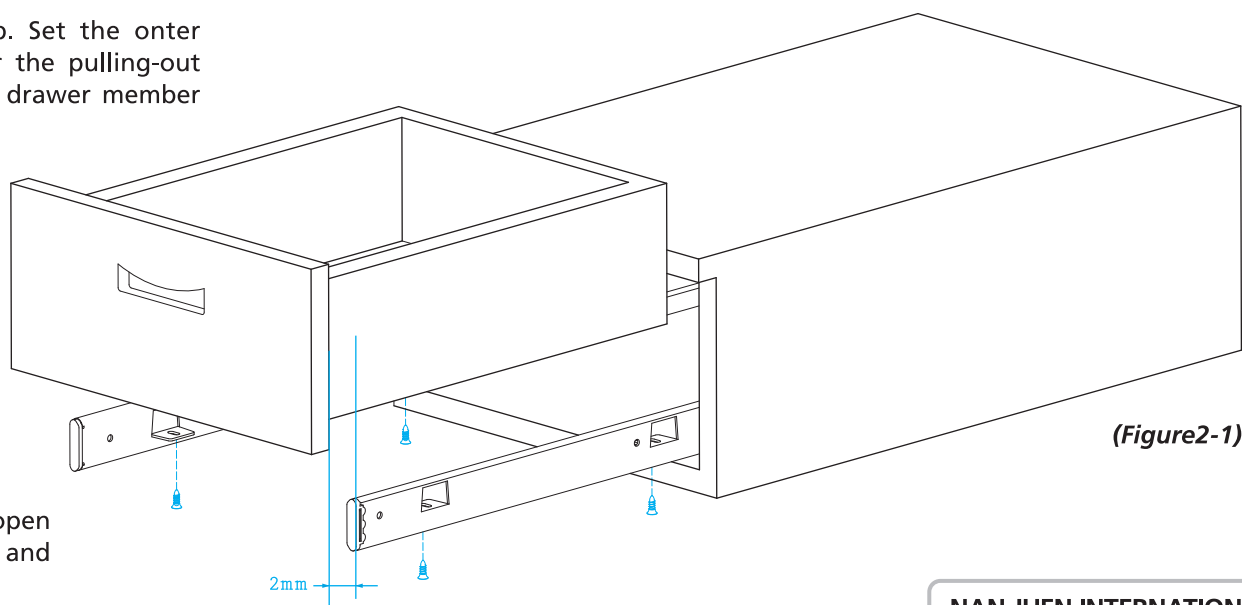

**Final Adjustment.....**

Try to open and close the drawer to see if detent open and slides function correctly. If so, secure the screws and install additional screws as necessary.

※This instruction is for reference only. It may vary due to different applications.

**NAN JUEN INTERNATIONAL CO., LTD.**  
No.2, Dazhi Rd., Taoyuan Dist., Taoyuan City 330,  
Taiwan (R.O.C.)  
**T** + 886 - 3 - 3642777(Rep.) **F** + 886 - 3 - 3762777  
**[www.repongroupp.com](http://www.repongroupp.com)**

